




IMPORTANT INFORMATION

- Watertight tray thickness $\geq 0,63$ mm
- Maximum distance between fastenings : 6 m
- Periodic inspection at least once every 12 months

PRODUCT ADVANTAGES

- Easy and quick to install
- Simultaneous use for up to 4 users
- Rigid lifeline in anodized aluminum
- Rails and lifeline components are free from sharp edges that might damage ropes
- No rule for spacing between fastening and splice

EXTENSION +	<p>DIRECT FASTENING</p> <p>THE FASTENER IS DIRECTLY INSTALLED ON THE WALL</p> 	<p>FASTENER ON RIGID POST</p> <div data-bbox="614 1444 1029 1702"> </div> <p>POST FOR CONCRETE SLAB 300 mm Divalto Réf : A0014079 Commercial Ref : P300</p> <p>POST FOR CONCRETE SLAB 500mm Divalto Réf : A0014080 Commercial Ref : P500</p>
	<p>FASTENING</p> 	<p>SHORT RAIL FASTENER Divalto Réf : A0014133 Commercial Ref : R25</p> <ul style="list-style-type: none"> • Double fastenings at rail ends if span > 5 m. • Install fastenings before and after each angle.

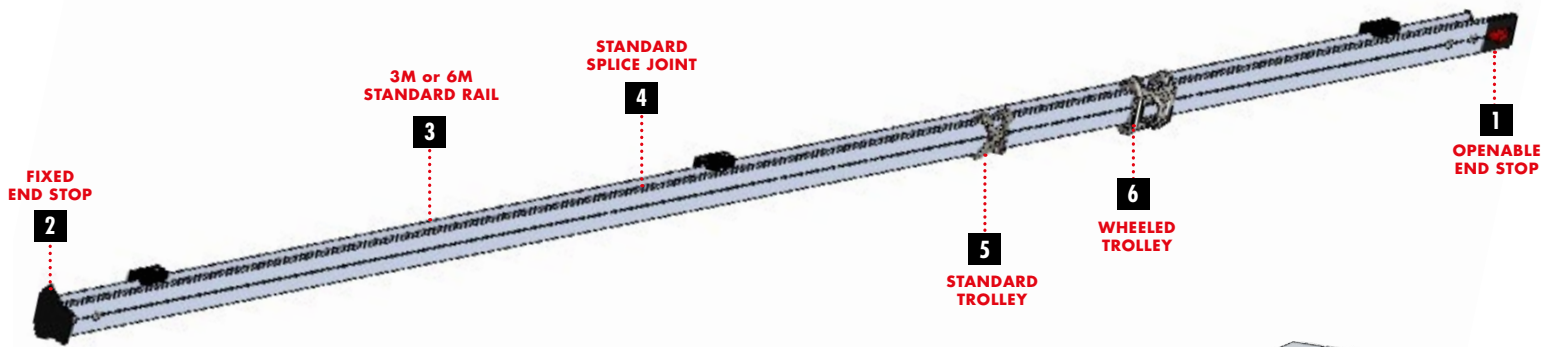

1

OPENABLE END STOP

Divalto Réf : A0014131
Commercial Ref : R22

Stainless steel 304 end stop to prevent the trolley from sliding at the end of the lifeline. **This removable stop allows easy insertion and removal of the trolleys.**

2

FIXED END STOP

Divalto Réf : A0014129
Commercial Ref : R21

304-grade stainless steel end stop. **Prevents trolley movement at the end of the lifeline.**

3

3M OR 6M STANDARD RAIL

Divalto Réf : A0014119 (3m) - Divalto Réf : A0014121 (6m)
Commercial Ref : R03 (3m) - Commercial Ref : R06 (6m)

The closed I-profile ensures excellent bending and torsional rigidity. The underside of the main flange has a rounded shape that optimizes the rolling of wheels at a 40° angle. This design ensures smooth travel, avoiding any interference with fasteners. The rail is connected to splices, end stops, and corner pieces using two FHC screws in 316-grade stainless steel.

4

STANDARD RAIL SPlice

Divalto Réf : A0014127
Commercial Ref : R20

Splice for joining two standard CONEKT rails.

5

SIMPLE TROLLEY

Réf Divalto : A0014137
Commercial Ref : R50

Standard 304-grade stainless steel trolley for use on ground, wall, or ceiling-mounted systems. **Designed for short rail lengths and configurations with low usage frequency and/or proximity to the user (maximum 2 m).**

6

TROLLEY WITH WHEELS

Réf Divalto : A0014139
Commercial Ref : R52

304-grade stainless steel trolley for use on ground, wall, or ceiling systems. Its 12 D15 rollers provide **excellent glide** along the lifeline and make it **compatible with all types of self-retracting fall arresters** (up to 10 kg).



ACCESS SIGN

Réf Divalto : A0015025
Commercial Ref : S20TRAD

The sign must be placed at the lifeline access point. It warns of a fall hazard and the requirement to wear a harness from this point onward.



LIFELINE DATA PLATE

Réf Divalto : A0015024
Commercial Ref : S21TRAD

It must be placed on the lifeline anchoring device. It serves as the lifeline's identification card.

Breaking strength of plates : 22kN.

Breaking strength of absorbers, tensioners, pass-throughs brackets and trolley : 15kN.

Downloadable data sheet on www.echellecanada.ca