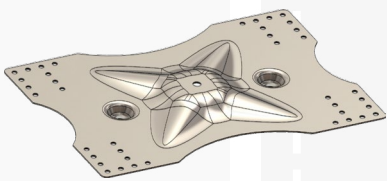
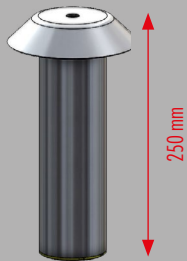



IMPORTANT INFORMATION

- Watertight tray thickness $\geq 0,63$ mm
- Distance between pass-through support brackets: 10-12 m max.
- Periodic inspection at least once every 12 months

PRODUCT ADVANTAGES

- Quick and easy to install
- Approved for 4 users simultaneously
- The components of the Lifeline have no sharp edges that could damage lanyards or ropes.

	DIRECT FASTENING	FASTENING ON DIABOLO	FASTENING ON POST
BASE PLATE	 <p>BASE PLATE 2 TOGGLE BOLTS Divalto Réf : A0014091 Commercial Ref : PB2</p>		
EXTENSION	<p>✗</p> <p>IT IS NOT POSSIBLE TO FIX THE RAIL FASTENER DIRECTLY ONTO THE BASE PLATE</p>	<p>✗</p> <p>IT IS NOT POSSIBLE TO RAISE WITH THE DIABOLO</p>	 <p>TILTING POST Divalto Réf : A0014093 Commercial Ref : PB250</p>

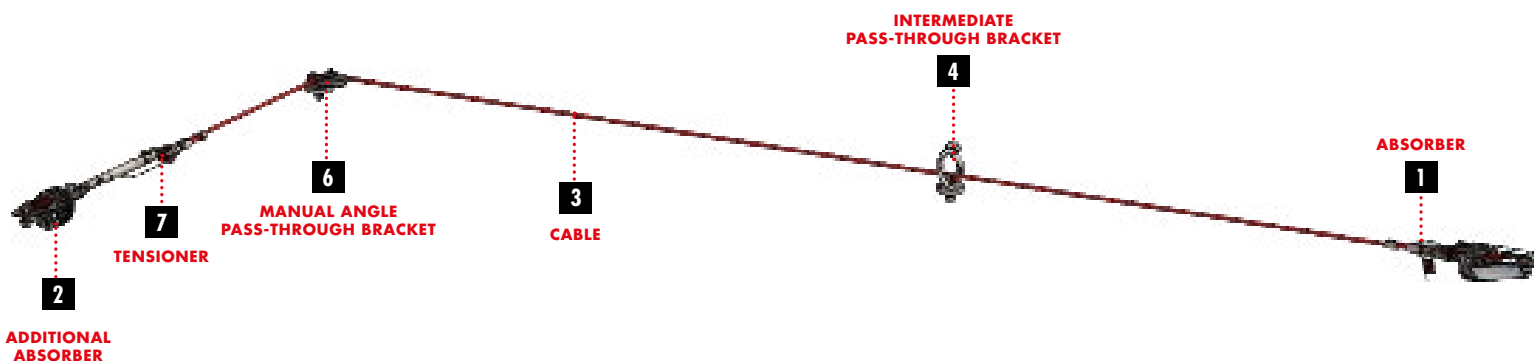

1

**MANUALLY CRIMPED ABSORBER /
MACHINE-CRIMPED ABSORBER**

 Divalto Réf : A0014048 / A0014054
 Commercial Ref : S03 / S08

It consists of a Secur-Vit termination with a tension indicator, a finishing piece, and an integrated starting plate. Lead is provided to seal the termination. It allows tensioning the lifeline up to 100 daN. A scale indicates the tension in the cable.

2

ADDITIONAL ABSORBER

 Divalto Réf : A0014053
 Commercial Ref : S07

The additional absorber allows positioning an absorber at both ends of the lifeline. A tension indicator is included to measure the tension. When combined with an S26 crimping clevis, this absorber enables the assembly of a CONEKT crimped lifeline.

3

CABLE

 Divalto Réf : A0003832
 Commercial Ref : S00

Flexible cable made of 7 strands of 19 wires in 316 stainless steel.

4

**INTERMEDIATE PASS-
THROUGH BRACKET**

 Divalto Réf : A0014051
 Commercial Ref : S05

It is equipped with a hook to make it compatible with PB250 posts. An angle of 5° is allowed at the entry and exit of the intermediate brackets..

5

**MANUAL ANGLE PASS-
THROUGH BRACKET**

 Divalto Réf : A0014052
 Commercial Ref : S06

Whenever there is an angle on the lifeline, an absorber at each end is mandatory. A minimum angle of 90° is required on rigid supports with a single angle bracket. On PB250 posts, a minimum interior angle of 120° is required with two mandatory angle brackets.

5

**MANUAL-CRIMPED
TENSIONER**

 Divalto Réf : A0014050
 Commercial Ref : S04

It consists of a Secur-Vit termination, a finishing piece, and an integrated starting plate. A lead seal is provided with the tensioner to secure the termination and the tensioner.

6

**MACHINE-CRIMPED
TENSIONER**

 Divalto Réf : A0014056
 Commercial Ref : S10

It is composed of a Ø 16 mm crimped termination. Five hexagonal crimps must be made to secure the cable.


ACCESS SIGN

 Réf Divalto : A0015025
 Commercial Ref : S20TRAD

The sign must be placed at the lifeline access point. It warns of a fall hazard and the requirement to wear a harness from this point onward.


LIFELINE DATA PLATE

 Réf Divalto : A0015024
 Commercial Ref : S21TRAD

It must be placed on the lifeline anchoring device. It serves as the lifeline's identification card.

Breaking strength of plates : 22kN.

Breaking strength of absorbers, tensioners, pass-throughs brackets and trolley : 15kN.

Downloadable data sheet on www.echellecanada.ca