


MANUAL CABLE LIFELINE ON CONCRETE WALL




ÉCHELLE CANADA EXCLUSIVITY

COMPLIANT WITH STANDARD EN 795 : 2012 and ACCORDING TO
CSA Z259.16-15 SPECIFICATIONS. *Design of active fall protection systems.*

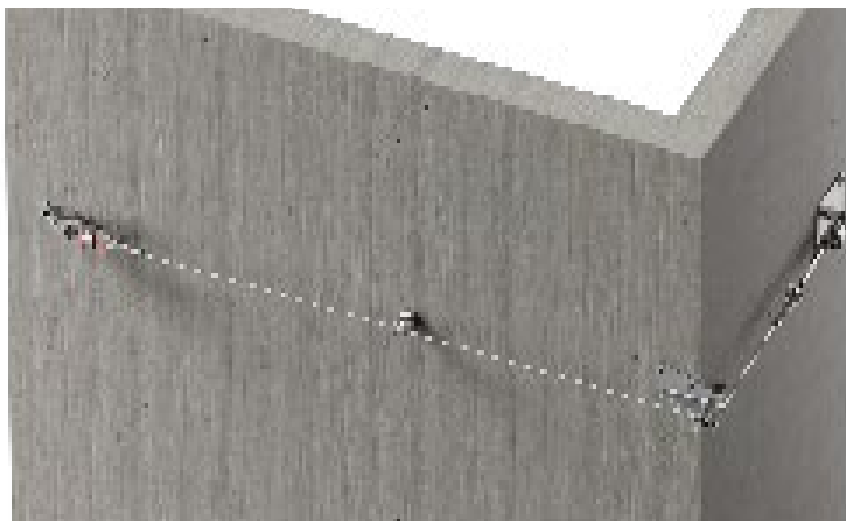


IMPORTANT INFORMATIONS



- Distance between pass-through support brackets: 15 m max.
- Periodic inspection at least once every 12 months




PRODUCT ADVANTAGES

- Quick and easy to install
- Approved for 4 users simultaneously
- The components of the Lifeline have no sharp edges that could damage lanyards or ropes.

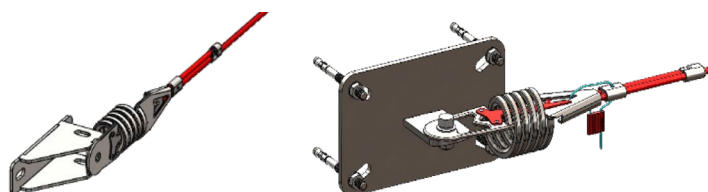

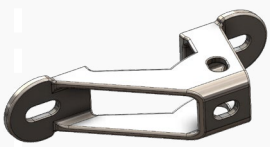	DIRECT FASTENING	FASTENING ON DIABOLO	FASTENING ON POST
BASE PLATE	 <p>END PLATE (2 fixings)</p> <p>Divalto Réf : A0014058 Commercial Ref : S12</p>	 <p>END PLATE (4 fixings)</p> <p>Divalto Réf : A0014059 Commercial Ref : S13</p>	
+			
EXTENSION	<p>THE LIFELINE IS DIRECTLY INSTALLED ONTO THE PLATES</p>	<p>✗</p> <p>IT IS NOT POSSIBLE TO RAISE WITH THE DIABOLO</p>	<p>✗</p> <p>IT IS NOT POSSIBLE TO RAISE WITH THE TILTING POST</p>

COMPONENTS

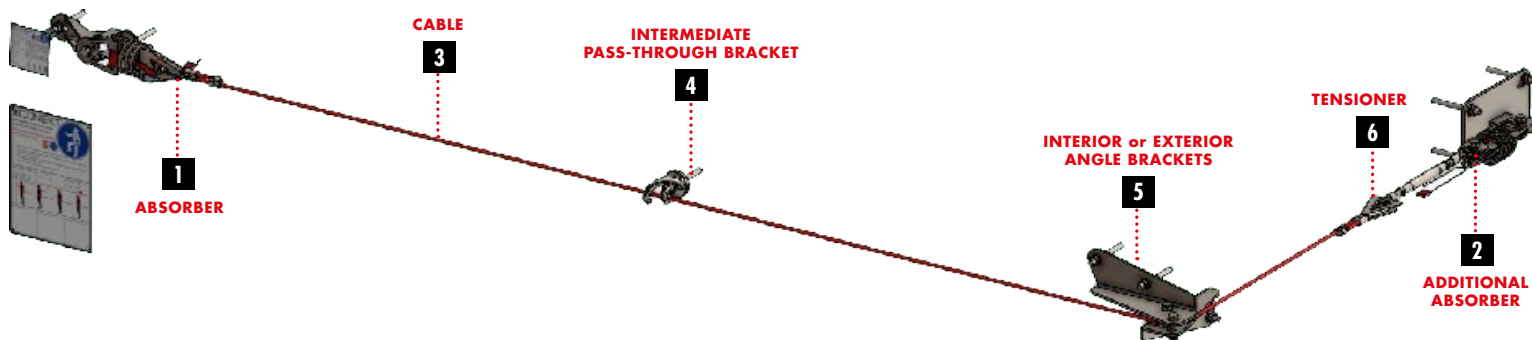

1

MANUALLY CRIMPED ABSORBER / MACHINE-CRIMPED ABSORBER

Divalto Réf : A0014048 / A0014054
Commercial Ref : S03 / S08

It consists of a Secur-Vit termination with a tension indicator, a finishing piece, and an integrated starting plate. Lead is provided to seal the termination. It allows tensioning the lifeline up to 100 daN. A scale indicates the tension in the cable.

2

ADDITIONAL ABSORBER

Divalto Réf : A0014053
Commercial Ref : S07

The additional absorber allows positioning an absorber at both ends of the lifeline. A tension indicator is included to measure the tension. When combined with an S26 crimping clevis, this absorber enables the assembly of a CONEKT crimped lifeline.

3

CABLE

Divalto Réf : A0003832
Commercial Ref : S00

Flexible cable made of 7 strands of 19 wires in 316 stainless steel.

4

INTERMEDIATE PASS-THROUGH BRACKET

Divalto Réf : A0014051
Commercial Ref : S05

It is equipped with a hook to make it compatible with PB250 posts. An angle of 5° is allowed at the entry and exit of the intermediate brackets..

5

MANUAL ANGLE BRACKET INTERIOR / EXTERIOR

Divalto Réf : A0014875 / A0014876
Commercial Ref : S27 / S28

Allows interior and exterior angle transitions for wall-mounted configurations of manual-pass lifelines.

6

MANUAL-CRIMPED TENSIONER

Divalto Réf : A0014050
Commercial Ref : S04

It consists of a Secur-Vit termination, a finishing piece, and an integrated starting plate. A lead seal is provided with the tensioner to secure the termination and the tensioner.

6

MACHINE-CRIMPED TENSIONER

Divalto Réf : A0014056
Commercial Ref : S10

It is composed of a Ø 16 mm crimped termination. Five hexagonal crimps must be made to secure the cable.

**ACCESS SIGN**

Réf Divalto : A0015025
Commercial Ref : S20TRAD

The sign must be placed at the lifeline access point. It warns of a fall hazard and the requirement to wear a harness from this point onward.

**LIFELINE DATA PLATE**

Réf Divalto : A0015024
Commercial Ref : S21TRAD

It must be placed on the lifeline anchoring device. It serves as the lifeline's identification card.

Breaking strength of plates : 22kN.

Breaking strength of absorbers, tensioners, pass-throughs brackets and trolley : 15kN.

Downloadable data sheet on www.echellecanada.ca